

SUNKOLL TILE EPOXY TECHNICAL DATA SHEET


SUNKOLL[®]
ABILITY ♦ STABILITY ♦ DURABILITY

नए भारत क नई ताकत

Main application
SUNKOLL TILE EPOXY for filling of tiles & Stone joints upto 15 mm on floor and on wall.

SUNKOLL TILE EPOXY is consisting of high quality special coated colour quartz, eco-friendly resin & hardener. The grout provides excellent high-quality joints between tiles & stone. The joints are chemical, stain & abrasion resistance.

How To Use

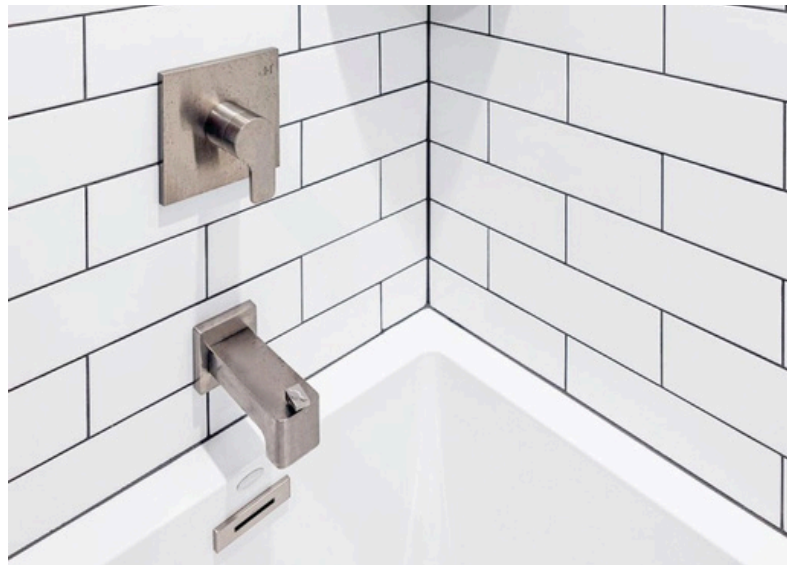

Application Areas

- Wall Tiles & Floor Tiles
- Interiors & Exteriors
- Shower, Swimming Pool
- Heavily Traffic Area
- Hygienic Sterile
- Chemical Resistance Area
- Hydrotherapy Pools

Features

- Stain Free
- Easy to Install & Clean
- Water Cleanable
- Non Creaking
- Anti-bacterial & Anti-Fungal
- High Glossy
- Chemical & Temperature Resistance
- Easy Maintenance
- Hard & Durable Joints
- Waterproof & Acid Proof

www.sunkoll.com

Water Proofing Chemicals | Adhesives | Grouts/Epoxy Grouts | Wall Putty

Application Procedure :

- Mix 100 gram Hardener & 200 gram Resin. After that Mix 700 gram Filler Powder and Make a good paste, fill the joints properly and slightly rub with wetted sponge after 10 MM.

Packaging :

- SUNKOLL TILES EPOXY is supplied in 1 kg. | 5 kg. | 20 kg. pack.

Coverage :

- Depends on Joints Width & Depth

Technical Information

PROPERTIES	RESULT
Joint Width	2 to 10 mm
Gel Time	60 min.
Specific Gravity	1.75
Water Absorption	Nil

Application Areas :

- Stain Free
- Color-Fast
- Easy to Install & Clean
- Chemical & Temperature Resistant
- Non-Cracking or Powdering
- Water Cleanable when Fresh
- Available in Range of Attractive Color

Technical Properties

Compressive Strength	65 N/mm ²
Tensile Strength	65 N/mm ²
Bond Strength	65 N/mm ²
Port Life	40 to 45 Minute
Final Strength	72 Hours

SUNKOLL TILE EPOXY

SUNKOLL[®]
ABILITY ♦ STABILITY ♦ DURABILITY

नए भारत क नई ताकत



SUNKOLL Green Building Index :

SUNKOLL Range of Products are most eco-friendly and suitable to use in all kind of buildings including certified green. Apart from using best of international raw material for best performance, SUNKOLL procure the major raw material locally to safeguard environment.

SUNKOLL Quality & Safety Assurance

Products supplied are safe to use by any worker at site. However proper tools and safety measures must be in place for prolong working. The gloves, safety glasses and other protection measure must be followed as per local regulation.

Declaration :

Check before using the product about performance and final expected results. **SUNKOLL** cannot be held All the above information and results are provided based on **SUNKOLL** internal quality test. Customer must responsible for any damage of whatsoever nature at site.

UNIT - 1 **SUNKOLL INDUSTRIES LIMITED**

Plot No. 62, Tarang Industrial Estate
Hadamtada Ta. Kotda Sangani N.H. 8-B
Rajkot(Gujarat) - 360 311

UNIT - 2 **SUNKOLL INDUSTRIES LIMITED BARODA**

UNIT - 3 **SUNKOLL INDUSTRIES LIMITED JAIPUR**

UNIT - 4 **SUNKOLL INDUSTRIES LIMITED GUWAHATI**

TECHNICAL SERVICES & CUSTOMER CARE MANAGER : +91 70698 82251

TOLL FREE : 1800 890 2343

Email: sunkollindltd@gmail.com

www.sunkoll.com

Water Proofing Chemicals | Adhesives | Grouts/Epoxy Grouts | Wall Putty